

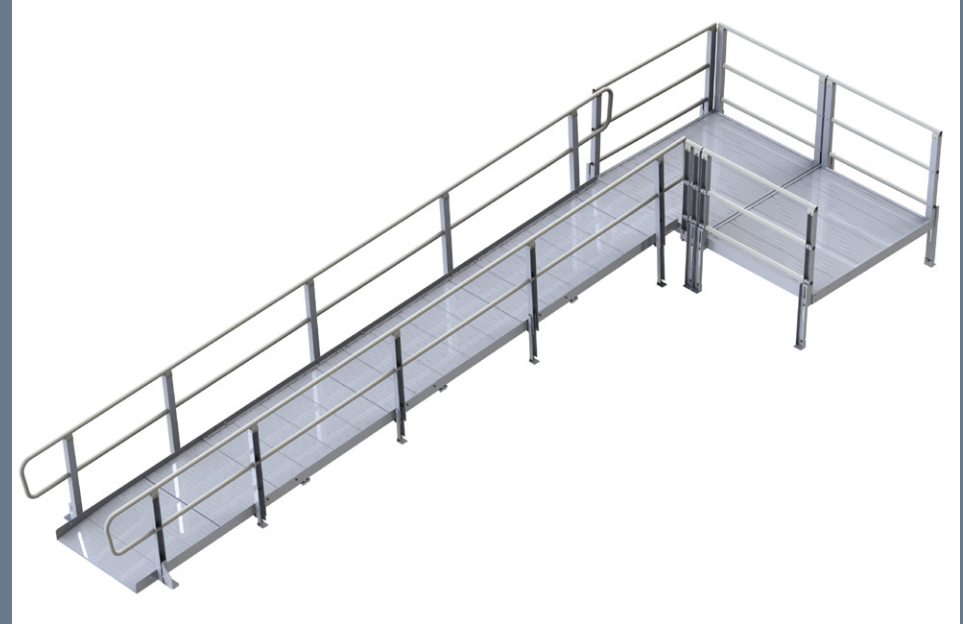
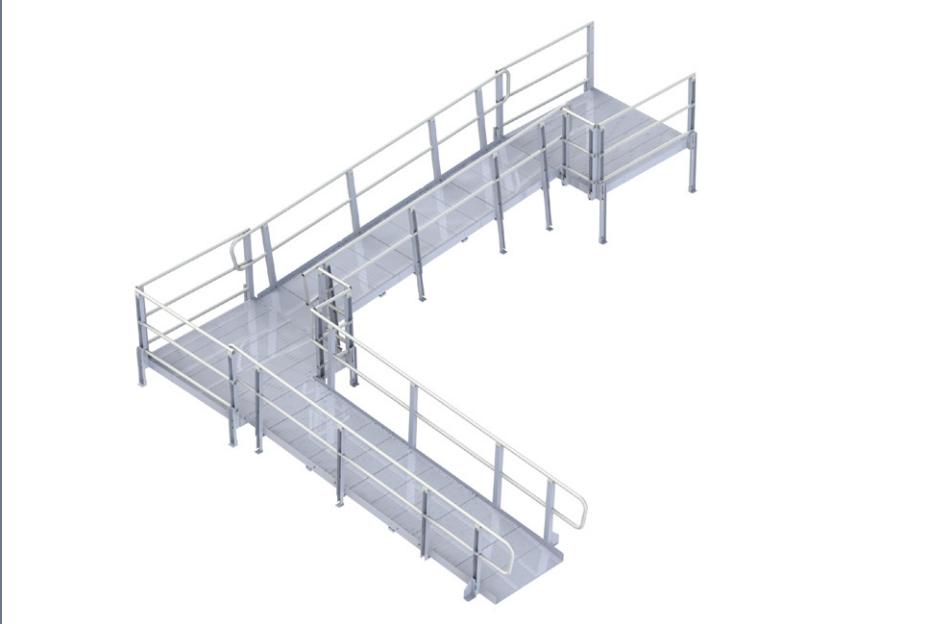


## FEATURES

- Ramp sections welded in lengths of 3 and 4'
- Can be easily moved or reconfigured
- Durable and weather resistant
- Little or no site preparation required
- All aluminum construction
- Little or no maintenance
- 45° and 90° turns and switchbacks
- Multiple configurations possible
- ADA handrail extensions, stairs and gates available
- Accommodates a rise up to 60"
- Comes with a Limited Lifetime Warranty

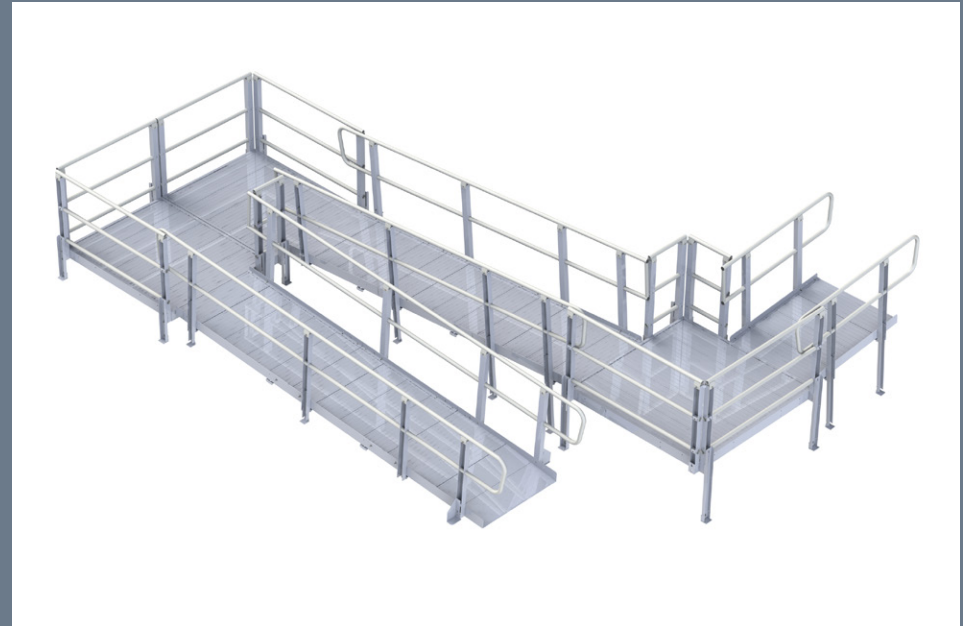

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Width</b>                | 36"                                  |
| <b>Length</b>               | As Required - 4' minimum             |
| <b>Load Capacity</b>        | 100 lbs. per square foot             |
| <b>Slope</b>                | Adjustable - as required             |
| <b>Floor</b>                | Slip resistant grooved aluminum      |
| <b>Ramp Edge Protection</b> | 4" Curb                              |
| <b>Handrails</b>            | Double 1½" bar - standard height 36" |

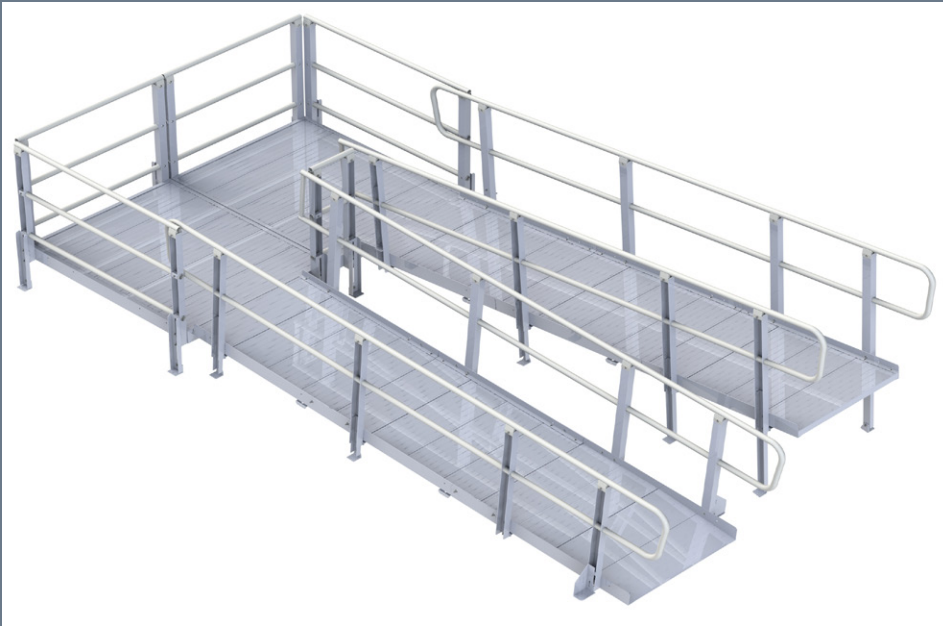

# FEATURES

- Ramps available in lengths of 3', 4', 6', 7', 8', 9' and 10'
- Comes with handrail
- Welded in 3' and 4' sections and then spliced to create additional sizes
- Installs in minutes
- Durable and weather resistant
- Slip resistant grooved aluminum surface
- All aluminum construction
- Little or no maintenance
- ADA extended handrail available upon request



| Item Number | Length | Width | Weight   | Capacity* |
|-------------|--------|-------|----------|-----------|
| XPS336      | 3'     | 36"   | 49 lbs.  | 850 lbs.  |
| XPS436      | 4'     | 36"   | 59 lbs.  | 850 lbs.  |
| XPS536      | 5'     | 36"   | 69 lbs.  | 850 lbs.  |
| XPS636      | 6'     | 36"   | 88 lbs.  | 850 lbs.  |
| XPS736      | 7'     | 36"   | 98 lbs.  | 850 lbs.  |
| XPS836      | 8'     | 36"   | 108 lbs. | 850 lbs.  |
| XPS936      | 9'     | 36"   | 117 lbs. | 850 lbs.  |
| XPS1036     | 10'    | 36"   | 127 lbs. | 850 lbs.  |

Not sure which ramp length you need? Refer to pages 13-14 to help you.

\* Maximum ramp capacity: 425 lbs. (One axle) – 850 lbs. (Two axles).